

i9600 Series

i9600

Dual-Screen Smart POS Payment Terminal

From checkout to shared connection — synced, trusted, built for growth.



Dual Screens. Clearer Checkout.

A 6.745" main display and a 2.5" customer-facing touch display keep both sides aligned with shared visibility and real-time confirmation.



Slim Profile. Natural Interaction.

At just 19 mm, with a 73.5° ergonomic tilt, i9600 creates a cleaner counter presence and more comfortable viewing.



Smooth Performance. All-day Readiness.

Android 13, standard Quad-core 2.0GHz processor, optional Octa-core 2.0GHz configuration, and a 5,000mAh battery (6,200mAh optional) support responsive operation through long shifts.



One Device. All Payment Methods.

Supports magnetic card, IC card, NFC contactless, QR payments, and built-in 80mm/s thermal printing with bi-directional tear for quick, efficient receipt handling — even during peak hours.




Magnetic Snap-on Charging. Built for Effortless Use.

Side-mounted magnetic snap-on Pogo pin charging delivers quick, one-handed connection, break-away safety, and a dust-resistant design for enhanced port longevity.



Versatile Imaging. More Possibilities.

Optional 16MP front and rear cameras support face recognition, photo capture, QR scanning, and loyalty identification for more versatile in-store workflows.

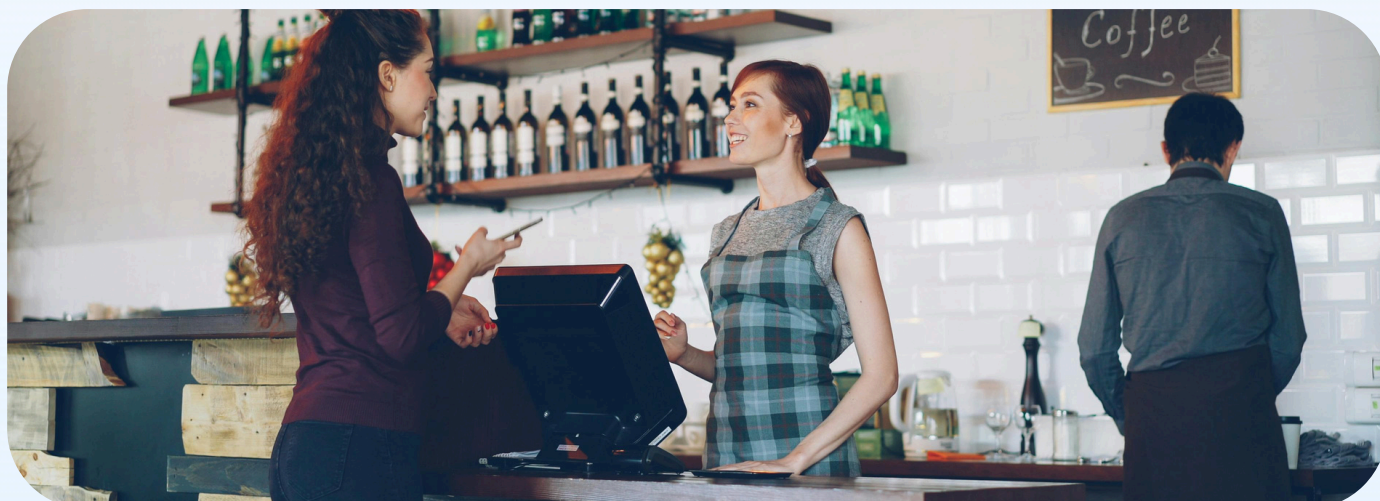

Notice:

Product specifications, features, images are preliminar and may be modified before product release.

uovo@uovo.com

Performance

Processor	Quad-core A53 2.0 GHz	●
O.S.	Android 13	●
Memory	- RAM: 2 GB ROM: 16 GB - RAM: 3 GB ROM: 32 GB	● Optional
Main Display	6.745" color display, capacitive touch, 720×1600 px	●
Customer Display	2.5" color display, capacitive touch, 480×272 px	Optional
Camera	Top Camera: 0.3 MP FF, code scanning (Optional) <i>Notes: Available only when device is configured with 2.5" top display.</i> Front Camera: 2 MP FF, code scanning 16 MP AF, code scanning Rear Camera: 5 MP AF, flash, code scanning 16 MP AF, flash, code scanning	Optional Optional Optional
Scanner	Professional Scan Engine	Optional
Button	PWR button, Vol+/- button	●
Interface	1 Type-C USB 2.0 OTG 5 Pogo pins Magnetic Pogo pins (4 pins)	● Optional
Battery	Removable li-polymer battery, 3.85 V / 5000 mAh 19.25 Wh	●
Power Supply	5 V / 2 A Power LED, Red	●
Audio	Speaker(1 W) USB-C for Audio output Mic	● ● Optional
Sensor	G-sensor	Optional

Connectivity

Cellular	FDD-LTE, TDD-LTE, WCDMA, GSM	●
Wi-Fi	IEEE 802.11 a/b/g/n/ac 2.4GHz/5GHz	●
Bluetooth	Bluetooth® v5.0	●
Slot	1 Micro SIM + 1 Nano SIM + 2 SAM + 1 MicroSD 1 eSIM + 1 Nano SIM + 2 SAM + 1 MicroSD	● Optional
Positioning	GPS, A-GPS, BEIDOU, GLONASS, Galileo	●

Payment Acceptance

Magnetic card reader	Support ISO 1/2/3 track data, bi-directional swiping	●
Smart card reader	Support smart IC card, complies with ISO7816 standard and EMV L1&L2	●
NFC/Contactless	EMV Contactless L1 compliant; support ISO/IEC 14443 Type A/B	●
Thermal Printer	Contactless Notification LED, Blue/ Yellow/ Green/ Red High-speed thermal printer, 80mm/s Paper roll diameter: 40 mm Paper width: 58 mm	●
Certification	PCI PTS V6, EMV L1&L2, EMV Contactless L1, MasterCard Contactless, Visa PayWave, AMEX, DISCOVER, UnionPay QuickPass, TQM	●

Physical

Size	L x W x H: 201*79*61 mm (19.4 mm thinnest)	●
Weight	417 g including battery	●
Operating temperature	0 °C~50 °C (32 °F ~ 122 °F)	●
Storage temperature	-20 °C~70 °C (-4 °F ~ 158 °F)	●
Relative humidity	5%~95%, Non-condensing	●

Accessories

Accessories	Screen Protector POS Stand Holster Multi-functional Cradle Wireless Multi-functional Cradle	Optional
-------------	---	----------



UROVO PTE. LIMITED

en.urovo.com

1 Raffles Place, #21-01 One Raffles Place Tower 1, Singapore 048616

Urovo Europe

europa.urovo.com

Minervum 7170, 4817 ZN, Breda The Netherlands

Urovo North America

us.urovo.com

5319 University Dr., Suite 367, Irvine, CA 92612, USA